

TITANIUM® UDL 50


SYNTHETIC ROOFING UNDERLAYMENT

**ELITE GRADE
FOR USE UNDER ALL PREMIUM: METAL, TILE,
SLATE, SHAKE & SHINGLE ROOFING**

- Up to 6 months UV exposure rating
- Meets and exceeds ASTM D226 Types I & II
- ICC ES Approved
- Class A Fire ASTM E108
- CAN/CSA A220.1
- Meets Class 4 Hail Rating
- Florida Building Code Approved
- Texas Department of Insurance
- 5 times lighter & 25 times stronger than 30 lb felt
- Contributes to LEED® points, 100% Recyclable
- All temperature performance -40°F to 240°F
- Synthetic construction inert to mold growth
- Cool gray surface, doesn't expand or contract
- Dual logo custom printing available

SPECIFICATIONS

| | |
|-------------------|---------------------------|
| LENGTH PER ROLL: | 250' / 76.2 m |
| WIDTH PER ROLL: | 48" / 122 cm |
| WEIGHT PER ROLL: | 48 lbs / 21.8 kg |
| NET ROLL SIZE: | 10 sq / 93 m ² |
| ROLLS PER PALLET: | 25 |
| PALLET WEIGHT: | 1250 lbs / 567 kg |

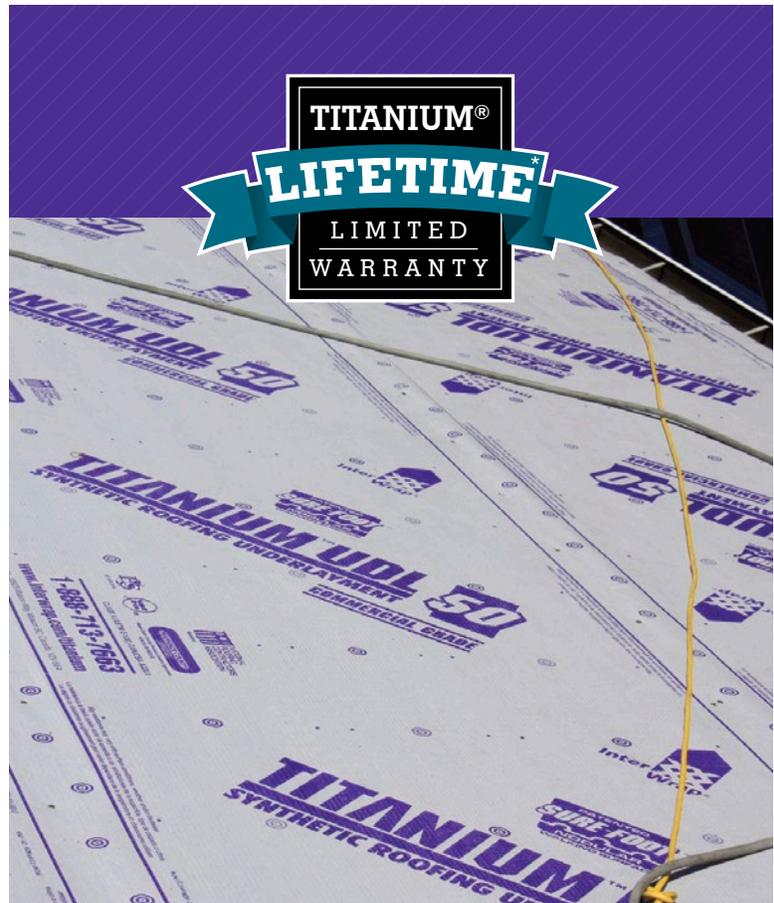

*See www.InterWrap.com/LifetimeWarranty for complete coverage and restrictions

| TEST & STANDARD | UDL50 TYPICAL VALUE | ASTM #30 FELT TYPICAL VALUE |
|-------------------------------|---------------------------------------|---------------------------------------|
| Class A Fire ASTM E108 | Pass | N/A |
| Nail Sealability ASTM D1970 | Pass | N/A |
| Permeability ASTM E96 | 0.05 perms | 1.75 perms |
| Water Transmission ASTM D4869 | Pass | Pass |
| Tear Strength ASTM D4533 | MD 55 lbs (25 kg) CD 55 lbs (25 kg) | MD 4 lbs (1.8 kg) CD 2 lbs (0.9 kg) |
| Tensile Strength ASTM D751 | MD 178 lbs (81 kg) CD 176 lbs (80 kg) | MD 70 lbs (32 kg) CD 38 lbs (17 kg) |
| Burst Strength ASTM D751 | 300 psi (2065 kPa) | 62 psi (430 kPa) |
| Elongation ASTM D751 | MD 20 % CD 20 % | MD 2% CD 2% |
| Weight per Square ASTM D5261 | 4.7 lbs (2.13 kg) | 27.5 lbs (12.5 kgs) |
| Minimum Thickness ASTM D1777 | 30 mils (0.75 mm) | 60 mils (1.5 mm) |
| Temperature Range | -40°F to 240°F (-40°C to 115°C) | |



1-800-453-0349



This product is manufactured in accordance with national standards which allow for non-critical variances in weights and measures.
Test data is based on average taken over several production runs and should not be considered or interpreted as minimum or maximum values. Values are typical data and not limiting specifications.
All values ± 10 %. UDL50_SS_22April2015