

Special Notes

- Before installing the Mechanical Combination Lock, familiarize yourself with the operation and functions.
- Unless manufactured to special order:
- **The default User Code is 2244.**
- **This code is common to all standard locks and it is very important that you set your own personal User Code.**
- **Your lock is not secure until you have changed the default User Code.**
- **Keep a safe record of your USER CODE.**

Installation Guide

The MC-728 lock is supplied with a locking nut (22mm A/F), cam, cam washer & cam mounting screw (M4).

1. Remove all packaging.
2. Position the lock on the outside of the door as shown in Figure 1.
3. Holding the lock in position, add the locking nut and tighten to secure as shown in Figure 2.
4. Position the cam onto the rear of the lock as required, secure with the cam washer and cam mounting screw as shown in Figure 3.
5. Tighten the screw. Be careful not to damage the screw thread when tightening the screw.
6. Before closing the door, test the lock by selecting the correct User Code and rotating 90°.
7. Your lock should be ready to use.

LOCKEY

MC-728 Mechanical Combination Lock INSTALLATION INSTRUCTIONS

www.LockeyLocks.com

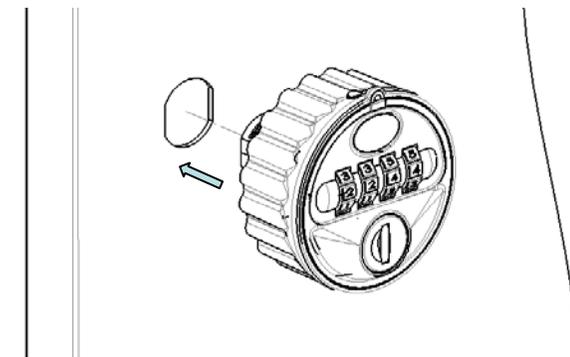


Figure 1.

Position lock through door panel as shown.

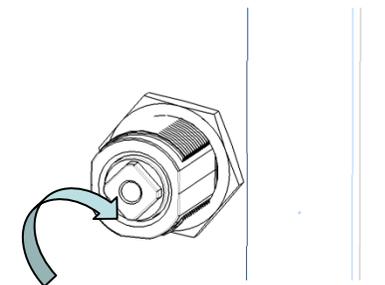


Figure 2.

Add locking nut & tighten to secure.

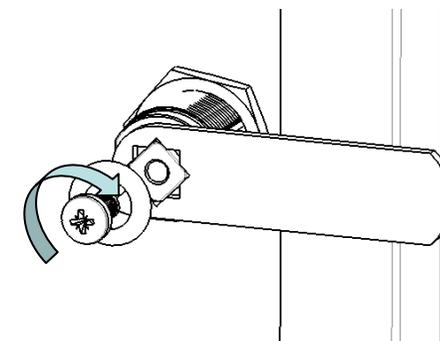


Figure 3.

Secure lock with cam, washer & screw. Tighten.