




by **TIE DOWN**

Folding Warning Line System Part #65002 & 65003


Set Up:

- 1) Pull Up
- 2) Pull Out
- 3) Push Down

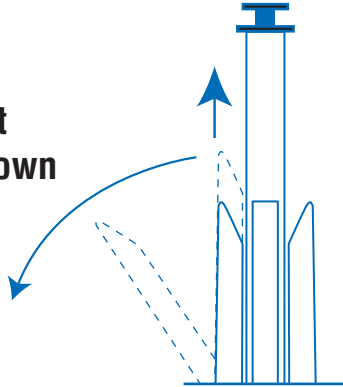

Break Down:

- 1) Pull Out
- 2) Pull Up
- 3) Lock Closed

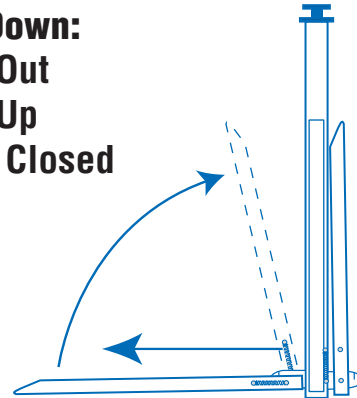

CAUTION: READ AND FOLLOW INSTRUCTIONS CAREFULLY BEFORE USE!

The following are basic warning line setup instructions. For complete guidelines, see OSHA 1926.501 and 1926.502 Fall Protection Standard and your local and state requirements.

1. The warning line shall be erected around all sides of the roof work area.
2. When mechanical equipment is not used, the warning line shall be erected not less than 6 feet from the roof edge.
3. When mechanical equipment is being used, the warning line shall be erected not less than 6 feet from the roof edge which is parallel to the direction of mechanical equipment operation, and not less than 10 feet from the roof edge which perpendicular to the direction of mechanical equipment operation.
4. Flags shall be rigged/supported so that its lowest point is no less than 34" and its highest point is no more that 39" from the walking/working surface.

Instructions #08245 (e1420 - Rev. 8/30/21)